


6748600, 9039600, 9039700, 9039800, 9312900

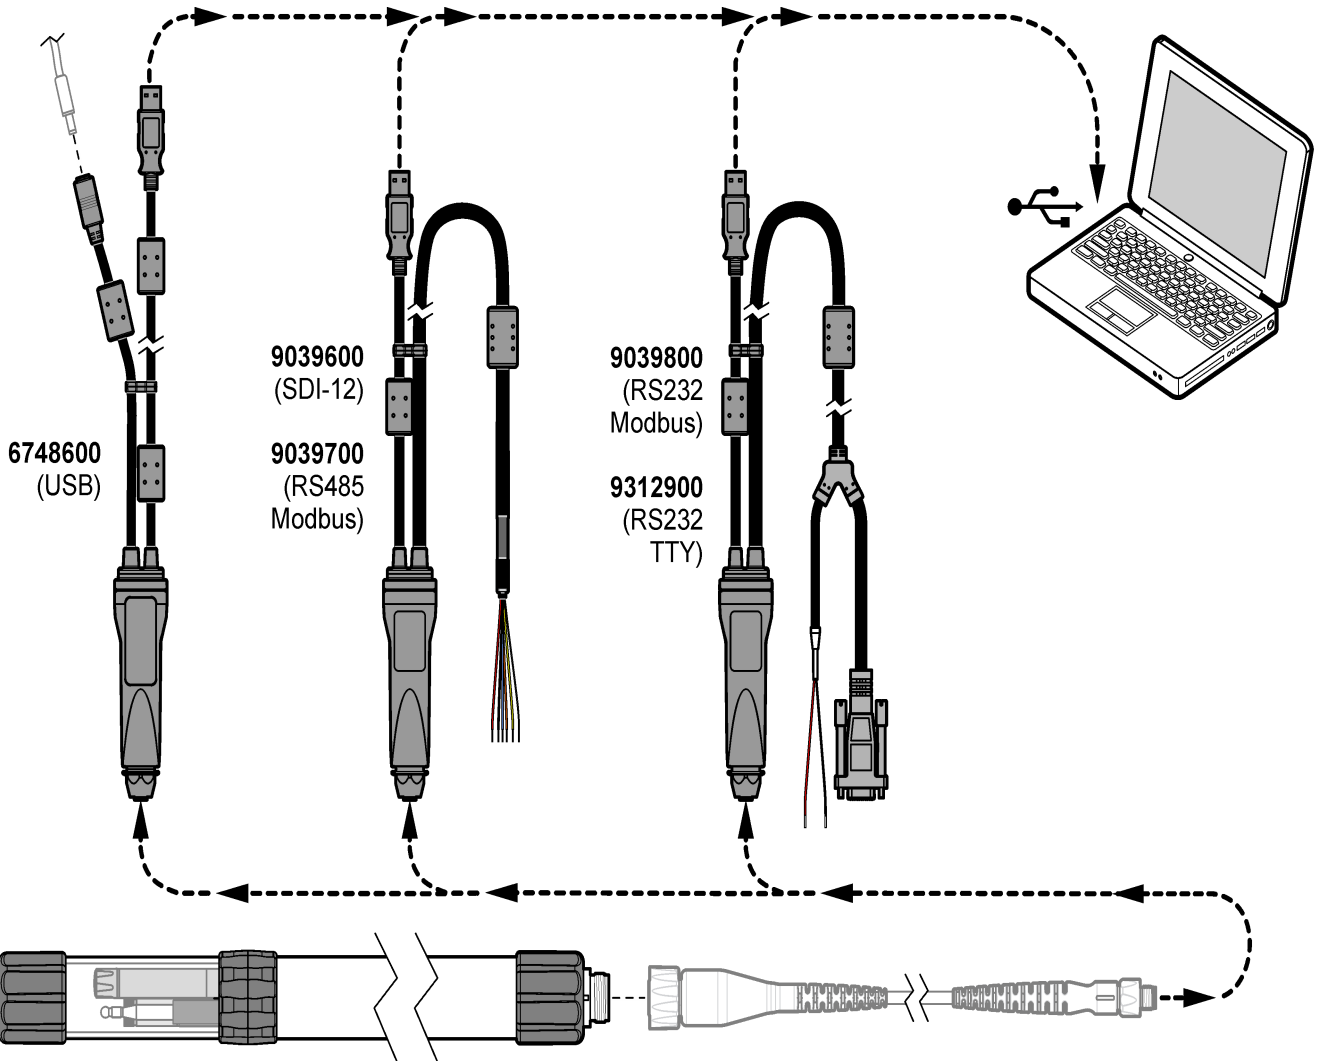

<b>9039600</b>	<b>EN</b>	Red	Black	Blue	Orange	Silver	Yellow
		8-24 VDC	Power ground	Data ground	SDI-12 data	Shield	—
	<b>DE</b>	Rot	Schwarz	Blau	Orange	Silber	Gelb
		8-24 VDC	Masse (Rückleitung)	Daten erde	SDI-12 daten	Schirm	—
	<b>IT</b>	Rosso	Nero	Blu	Arancione	Argento	Giallo
		8-24 VDC	Massa alimentazione (ritorno)	Massa dati	Dati SDI-12	Schermo	—
	<b>FR</b>	Rouge	Noir	Bleu	Orange	Argent	Jaune
		8-24 VDC	Masse (retour)	Données terre	Données SDI-12	Blindage	—
	<b>ES</b>	Rojo	Negro	Azul	Naranja	Plata	Amarillo
		8-24 VDC	Toma de tierra (retorno)	Datos de toma a tierra	Datos SDI-12	Blindaje	—
	<b>PT-BR</b>	Vermelho	Preto	Azul	Laranja	Prata	Amarelo
		8-24 VDC	Aterramento de energia (retorno)	Dados de aterramento	Dados SDI-12	Blindagem	—
	<b>ZH</b>	红色	黑色	蓝色	橙色	银	黄色
		8-24 VDC	电源接地 (回路)	数据基础	SDI-12 数据	屏蔽	—

<b>9039600</b>	<b>JA</b>	赤	黒	青	橙色	銀	黄色
		8-24 VDC	電源接地 (リターン)	グラウンドデータ	SDI-12 データ	シールド	—
	<b>PL</b>	czerwony	czarny	niebieski	pomarańczowy	srebrny	żółty
		8-24 VDC	Uziemienie ochronne	Masa sygnaludanych	Dane SDI-12	Ekran	—

<b>9039700</b>	<b>EN</b>	Red	Black	Blue	Orange	Yellow	Silver
		8-24 VDC	Power ground	Data return	RS-485 A	RS-485 B	Shield
	<b>DE</b>	Rot	Schwarz	Blau	Orange	Gelb	Silber
		8-24 VDC	Masse (Rückleitung)	Datenrückgabe	RS-485 A	RS-485 B	Schirm
	<b>IT</b>	Rosso	Nero	Blu	Arancione	Giallo	Argento
		8-24 VDC	Massa alimentazione (ritorno)	Restituzione dei dati	RS-485 A	RS-485 B	Schermo
	<b>FR</b>	Rouge	Noir	Bleu	Orange	Jaune	Argent
		8-24 VDC	Masse (retour)	Retour de données	RS-485 A	RS-485 B	Blindage
	<b>ES</b>	Rojo	Negro	Azul	Naranja	Amarillo	Plata
		8-24 VDC	Toma de tierra (retorno)	Retorno de datos	RS-485 A	RS-485 B	Blindaje
	<b>PT-BR</b>	Vermelho	Preto	Azul	Laranja	Amarelo	Prata
		8-24 VDC	Aterramento de energia (retorno)	Devolução de dados	RS-485 A	RS-485 B	Blindagem
	<b>ZH</b>	红色	黑色	蓝色	橙色	黄色	银
		8-24 VDC	电源接地 (回路)	数据返回	RS-485 A	RS-485 B	屏蔽
	<b>JA</b>	赤	黒	青	橙色	黄色	銀
		8-24 VDC	電源接地 (リターン)	データの戻り	RS-485 A	RS-485 B	シールド
<b>PL</b>	czerwony	czarny	niebieski	pomarańczowy	żółty	srebrny	
	8-24 VDC	Uziemienie ochronne	Powrót danych	RS-485 A	RS-485 B	Ekran	

<b>9039800, 9312900</b>	<b>EN</b>	Red	8-24 VDC	Black	Power ground
	<b>DE</b>	Rot	8-24 VDC	Schwarz	Masse (Rückleitung)
	<b>IT</b>	Rosso	8-24 VDC	Nero	Massa alimentazione (ritorno)
	<b>FR</b>	Rouge	8-24 VDC	Noir	Masse (retour)
	<b>ES</b>	Rojo	8-24 VDC	Negro	Toma de tierra (retorno)
	<b>PT-BR</b>	Vermelho	8-24 VDC	Preto	Aterramento de energia (retorno)
	<b>ZH</b>	红色	8-24 VDC	黑色	电源接地 (回路)
	<b>JA</b>	赤	8-24 VDC	黒	電源接地 (リターン)
	<b>PL</b>	czerwony	8-24 VDC	czarny	Uziemienie ochronne

**HACH Hydromet**  
5600 Lindbergh Drive  
Loveland, CO 80538 U.S.A.  
Tel. (970) 669-3050  
(800) 949-3766 (U.S.A. only)  
Fax (970) 461-3921  
sales@hachhydromet.com  
www.hachhydromet.com

**OTT Hydromet**  
Ludwigstrasse 16  
87437 Kempten, Germany  
Tel. +49 (0)8 31 5617-0  
Fax +49 (0)8 31 5617-209  
info@ott.com  
www.ott.com

